R32 SINGLE/MULTI- ZONE 8-way CASSETTE SYSTEM

24,000 BTU / H CASSETTE

SUBMITTAL DATA: TKH24D32AI + TWH24PD32AO

Job Name	Location		Date	
Purchaser	Engineer			
Submitted To	For	Reference	Approval	Construction
Unit Designation	Schedule No.			

AHRI CERTIFIED REF	**218001439**
ENERGY STAR No.	**4515439**





YBE1FB1F
(Standard)



YAW1F9
Cool-only
(Optional)



SQZ004
(Optional)



XE72-44/E
(Optional)



XE71-00/E
(Optional)



SYSTEM RATINGS		INDOOR UNIT DATA	
Cooling		**Fan Motor**	
Rated Capacity @ 95° F	22,000 BTU/H	Type	Centrifugal
Capacity Range	5,600-26,600 BTU/H	Panel Dimension W x L x H (inch)	37-13/32x 37-12/32x 2-3/64
Power Input	1,900 W	Output Power	35 W
Power Input (Min/Max)	430 / 2,790 W	FLA	1.20 A
SEER2 / EER2	22.50 / 11.60	Drainage Hose Size	1”
Heating		Air flow (Min/Max)	488/647 CFM
Rated Capacity @ 47° F	24,000 BTU/H	Dehumidification	5.28 pt/hr
Capacity Range	6,800-24,000 BTU/H	**Sound Pressure Level**	
Rated Capacity @ 17°F	19,400 BTU/H	Min / Max	40 /45 dB(A)
Rated Capacity @ 5°F	16,800 BTU/H	**OUTDOOR UNIT DATA**	
Power Input	2,010 W	**Compressor**	
Power Input (Min/Max)	460 / 2,640 W	Type	DC Inverter Rotary
HSPF2 (Region IV / V)	9.0 / 7.5	RLA	15.3 A
COP @47°F / @5°F	3.50 / 1.80	**Fan Motor**	
Operating Range		Output Power	60 W
Cooling	0°F ~ 122°F	RLA	0.9 A
	-18°C ~ 50°C	Sound Pressure Level	54 dB(A)
Heating	-22°F ~ 86°F	**Refrigerant Piping Data**	
	-30°C ~ 30°C	Liquid Pipe Size (OD)	1/4-in
Power Supply		Gas Pipe Size (OD)	5/8-in
Rated	208/230 V, 1 Phase, 60 Hz	Connection Method	Flared
Voltage Range	187 - 253 V	Pre-Charged R32 Amount	42.3 oz
Main Power Wire Size	Per Local Code	Additional Charge	0.4 oz/ft
Wire Size between IDU & ODU	14-4 AWG	Pre-Charge Length	25-ft
MCA	22 A	MAX Refrigerant Pipe Length	131-ft
MOCP/Max Breaker Size	30 A	MIN Refrigerant Pipe Length	10-ft
Moisture Protection	IPX4	MAX Refrigerant Pipe Height Difference	82-ft

FEATURES & FUNCTION SUMMARY: TKH24D32AI + TWH24PD32AO


SYSTEM FEATURES	
Multi Fan Speeds	7 Speeds
Indoor Fan Type	Centrifugal
Artificial Intelligence for Saving Energy	Version 1.0
Wired Controller Interface	YES
Auxiliary Electrical Heater	NO
Ventilation (Outdoor Air)	YES
Condensate Pump	YES
Overflow Cut-off Switch	YES
Electronic Expansion Valve	In Outdoor Unit
Coil Construction	Copper Tube-Aluminum Fin
Indoor Fin Coating (Blue)	Acrylic Resin/Anti-Corrosion
A2L Refrigerant Leakage Detector	Optional
WIRED CONTROLLER & REMOTE CONTROLLER FUNCTIONS	
Auto Mode	YES
Auto Fan	YES
Turbo Cooling	YES
Auto Swing (Horizontal)	NO
Auto Swing (Vertical)	YES
Dry Mode	YES
Dry Anti-Mildew (X-Fan) Mode	YES
Energy Saving Mode	YES
I Feel Function	YES
Lock on Remote Controller	YES
Quiet Mode	NO
Long Time Room Temperature Display ※	YES
Normal Sleep Mode	YES
Timer Mode	YES
LCD Back Light on Remote Controller	YES
Turbo Mode	YES
Cooling Only Controller	Optional with Remote YAW1F9
Freeze Guard/Holiday Mode (46°F/8°C)	YES
24Vac Signal 3rd party Backup Heater Output	Optional with XE71-00/E, SQZ004
Wifi Control	Optional with XE72-44/E

※ Available on XE72-44/E with [Mode]+[▲] during OFF status

DIMENSIONAL SPECIFICATIONS: TKH24D32AI


INDOOR UNIT DIMENSION

Unit: inch

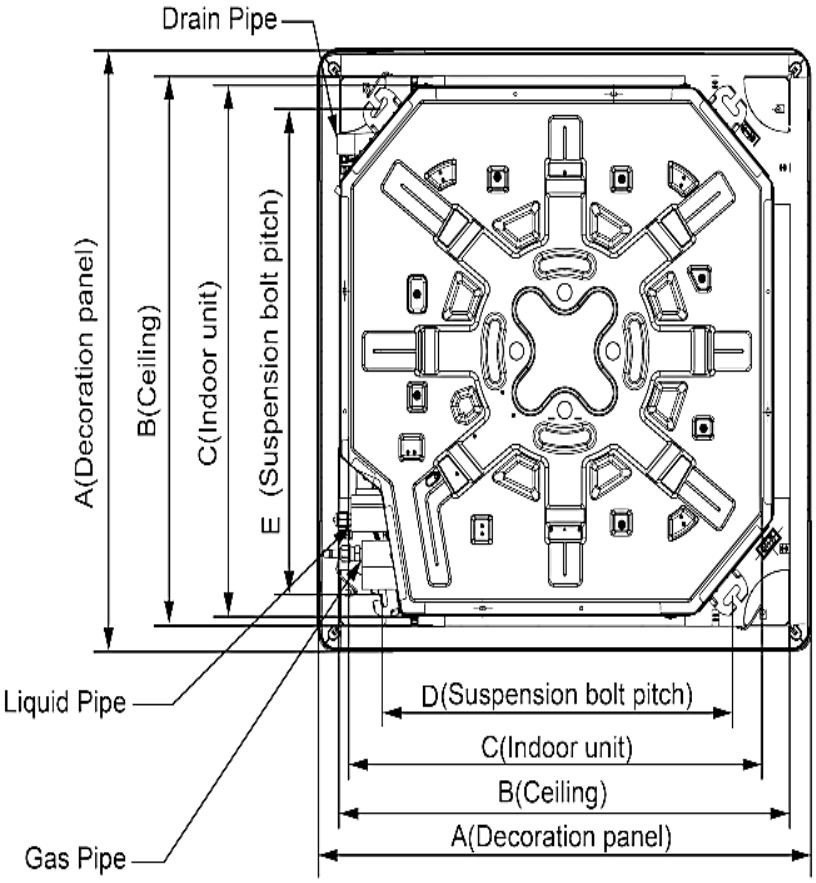


Dimensions	
A	37 13/32
B	34 1/4
C	33 5/64
D	26 49/64
E	30 45/64
F	9 29/64
G	5 5/16

Unit Weight (Net/Gross) 64 / 84 LBS
Panel Weight (Net/Gross) 14 / 21 LBS

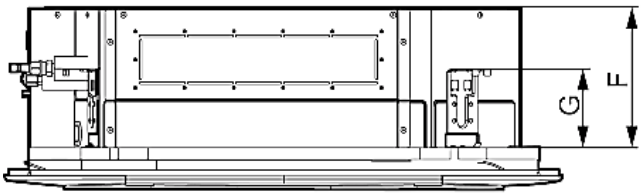

INDOOR CLEARANCE


Unit: inch

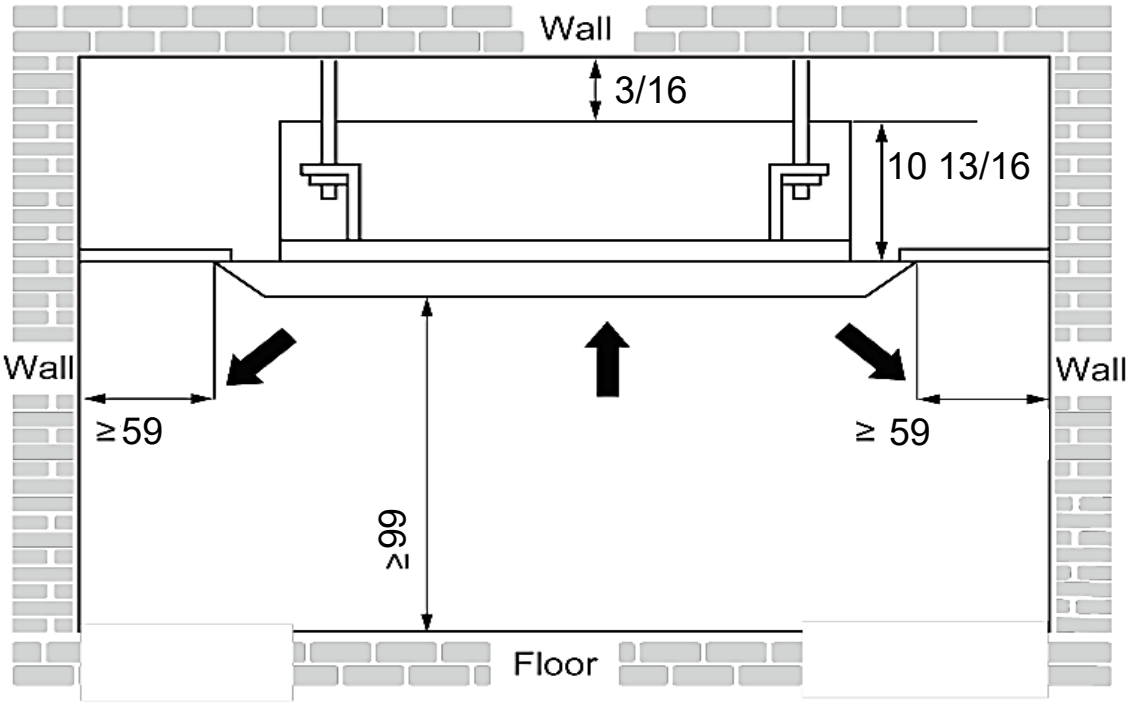


DIMENSIONAL SPECIFICATIONS: TWH24PD32AO

MINIMUM SPACING REQUIREMENTS

Unit: inch

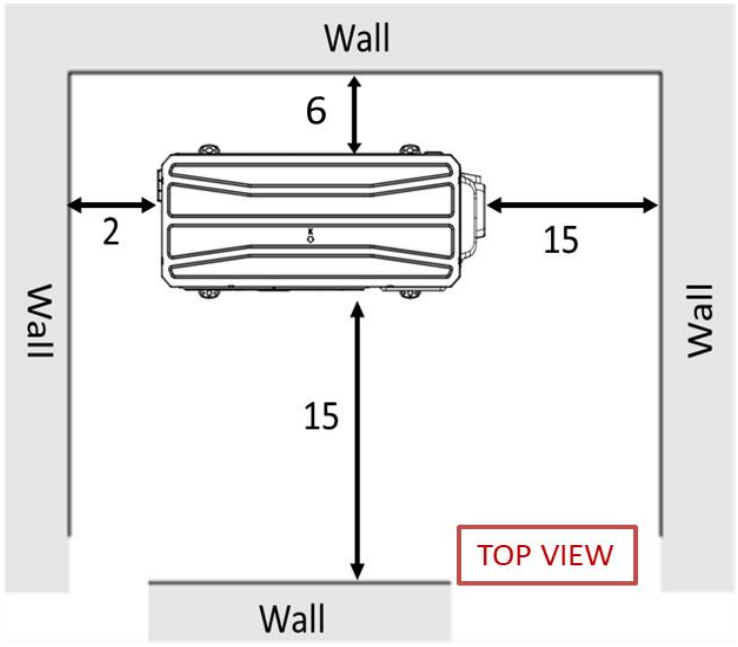


The ceiling should be open

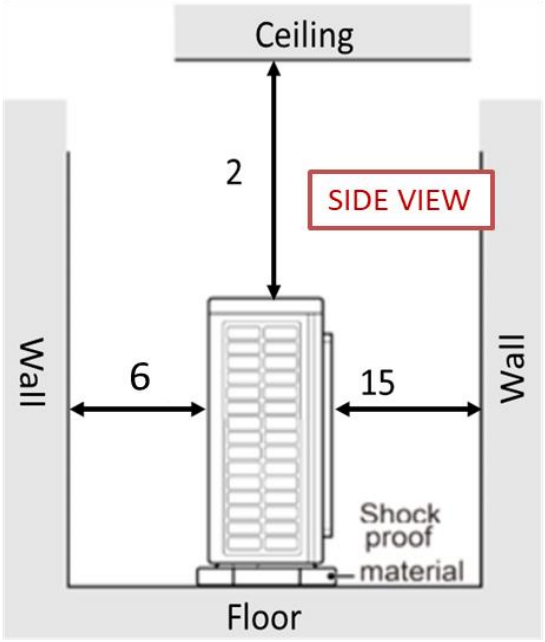



Either left or right side should be open

Note: Wall height on air outlet side ≤ 50inch

OUTDOOR UNIT DIMENSIONS

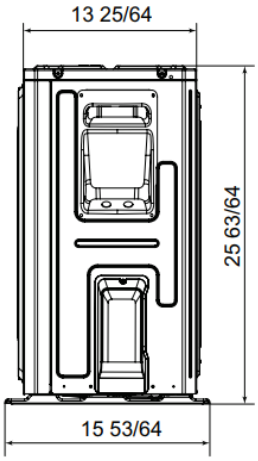

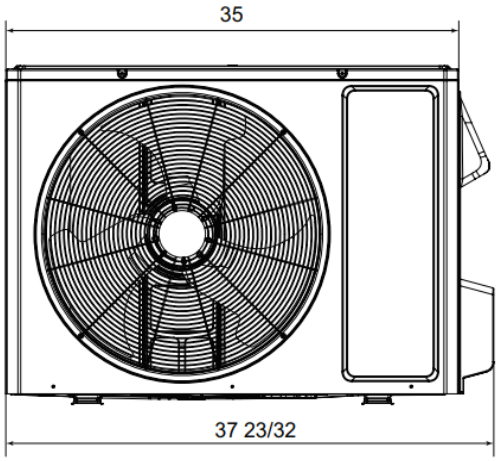

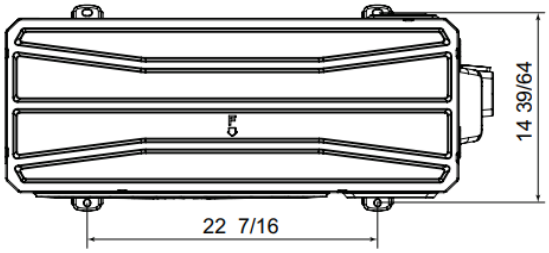

Unit: inch

Weight (Net/Shipping)
93 / 103 LBS

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	5/8-in OD Flared

Notes:

1. Recommended Interconnecting Cable Type 14 AWG 4 Stranded Copper Conductors Wire
2. Power wiring cable size must comply with applicable national and local codes
3. Test conditions are based on AHRI 210/240.