R32 SINGLE/MULTI- ZONE 8-way CASSETTE SYSTEM

36,000 BTU / H CASSETTE

SUBMITTAL DATA: TKH36D32AI + TWH36CD32AO

Job Name	Location		Date	
Purchaser	Engineer			
Submitted To	For	Reference	Approval	Construction
Unit Designation	Schedule No.			

AHRI CERTIFIED REF	**217488575**
ENERGY STAR No.	**4515428**





YBE1FB1F (Standard)



YAW1F9 Cool-only (Optional)



SQZ004 (Optional)



XE72-44/E (Optional)



XE71-00/E (Optional)



SYSTEM RATINGS		INDOOR UNIT DATA	
Cooling		**Fan Motor**	
Rated Capacity @ 95° F	33,600 BTU/H	Type	Centrifugal
Capacity Range	7,850-.37,500 BTU/H	Panel Dimension W x L x H (inch)	37 26/64x 37 26/64x 2 3/64
Power Input	3,077 W	Output Power	80 W
Power Input (Min/Max)	700 / 4,000 W	FLA	1.00 A
SEER2 / EER2	21.00 / 11.00	Drainage Hose Size	1”
Heating		Air flow (Min/Max)	665/1,071CFM
Rated Capacity @ 47° F	34,000 BTU/H	Dehumidification	7.82 pt/hr
Capacity Range	1,000-37,500 BTU/H	**Sound Pressure Level**	
Rated Capacity @ 17°F	22,000 BTU/H	Min / Max	39 / 52 dB(A)
Rated Capacity @ 5°F	23,400 BTU/H	**OUTDOOR UNIT DATA**	
Power Input	2,730 W	**Compressor**	
Power Input (Min/Max)	650 / 4,000 W	Type	DC Inverter Rotary
HSPF2 (Region IV / V)	8.5 / 7.5	RLA	16.0 A
COP @47°F / @5°F	3.64 / 1.90	**Fan Motor**	
Operating Range		Output Power	90 W
Cooling	-4°F ~ 122°F	RLA	1.7 A
	-20°C ~ 50°C	Sound Pressure Level	54 dB(A)
Heating	-13°F ~ 75°F	**Refrigerant Piping Data**	
	-25°C ~ 24°C	Liquid Pipe Size (OD)	1/4-in
Power Supply		Gas Pipe Size (OD)	5/8-in
Rated	208/230 V, 1 Phase, 60 Hz	Connection Method	Flared
Voltage Range	187 - 253 V	Pre-Charged R32 Amount	56.4 oz
Main Power Wire Size	Per Local Code	Additional Charge	0.4 oz/ft
Wire Size between IDU & ODU	14-4 AWG	Pre-Charge Length	25-ft
MCA	23 A	MAX Refrigerant Pipe Length	131-ft
MOCP/Max Breaker Size	35 A	MIN Refrigerant Pipe Length	10-ft
Moisture Protection	IPX4	MAX Refrigerant Pipe Height Difference	82-ft

TOSOT.COM

FEATURES & FUNCTION SUMMARY: TKH36D32AI + TWH36CD32AO


SYSTEM FEATURES	
Multi Fan Speeds	7 Speeds
Indoor Fan Type	Centrifugal
Artificial Intelligence for Saving Energy	Version 1.0
Wired Controller Interface	YES
Auxiliary Electrical Heater	NO
Ventilation (Outdoor Air)	YES
Condensate Pump	YES
Overflow Cut-off Switch	YES
Electronic Expansion Valve	In Outdoor Unit
Coil Construction	Copper Tube-Aluminum Fin
Indoor Fin Coating (Blue)	Acrylic Resin/Anti-Corrosion
A2L Refrigerant Leakage Detector	Optional
WIRED CONTROLLER & REMOTE CONTROLLER FUNCTIONS	
Auto Mode	YES
Auto Fan	YES
Turbo Cooling	YES
Auto Swing (Horizontal)	NO
Auto Swing (Vertical)	YES
Dry Mode	YES
Dry Anti-Mildew (X-Fan) Mode	YES
Energy Saving Mode	YES
I Feel Function	YES
Lock on Remote Controller	YES
Quiet Mode	NO
Long Time Room Temperature Display ※	YES
Normal Sleep Mode	YES
Timer Mode	YES
LCD Back Light on Remote Controller	YES
Turbo Mode	YES
Cooling Only Controller	Optional with Remote YAW1F9
Freeze Guard/Holiday Mode (46°F/8°C)	YES
24Vac Signal 3rd party Backup Heater Output	Optional with XE71-00/E, SQZ004
Wifi Control	Optional with XE72-44/E

※ Available on XE72-44/E with [Mode]+[▲] during OFF status

DIMENSIONAL SPECIFICATIONS: TKH36D32AI


INDOOR UNIT DIMENSION

Unit: inch

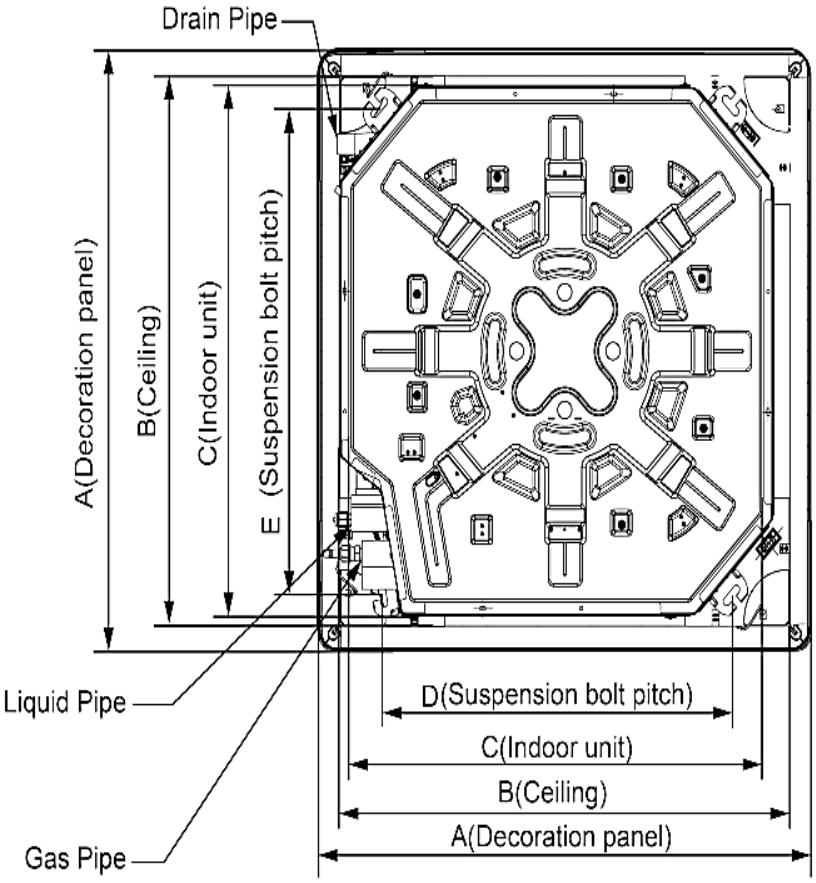


Dimensions	
A	37 3/8
B	35 1/16
C	33 1/16
D	26 3/4
E	30 11/16
F	9 7/16
G	5 5/16

Unit Weight (Net/Gross) 51 / 64 LBS
Panel Weight (Net/Gross) 14 / 21 LBS

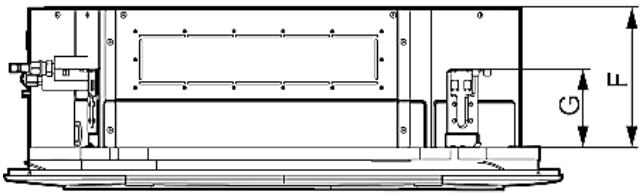

INDOOR CLEARANCE


Unit: inch

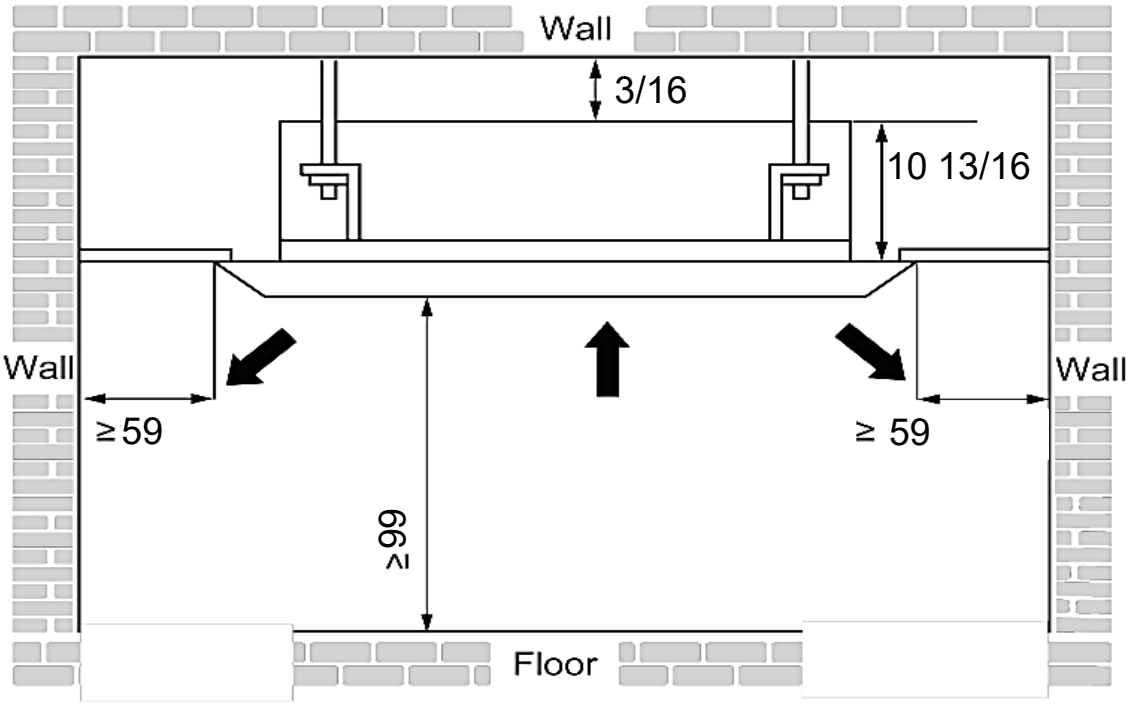


DIMENSIONAL SPECIFICATIONS: : TWH36CD32AO

MINIMUM SPACING REQUIREMENTS

Unit: inch

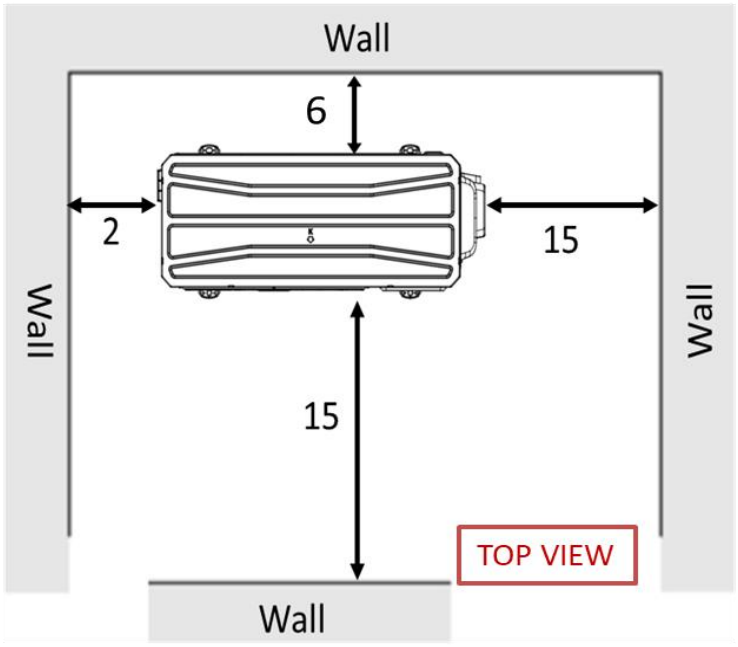


The ceiling should be open

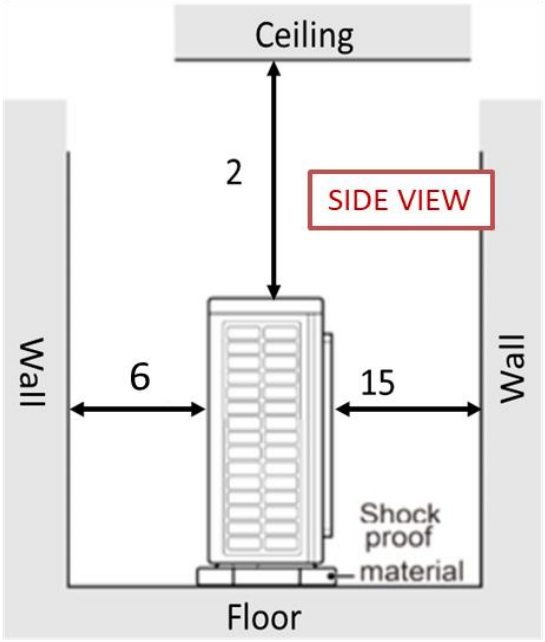

Either left or right side should be open

Note: Wall height on air outlet side ≤ 50inch

OUTDOOR UNIT DIMENSIONS

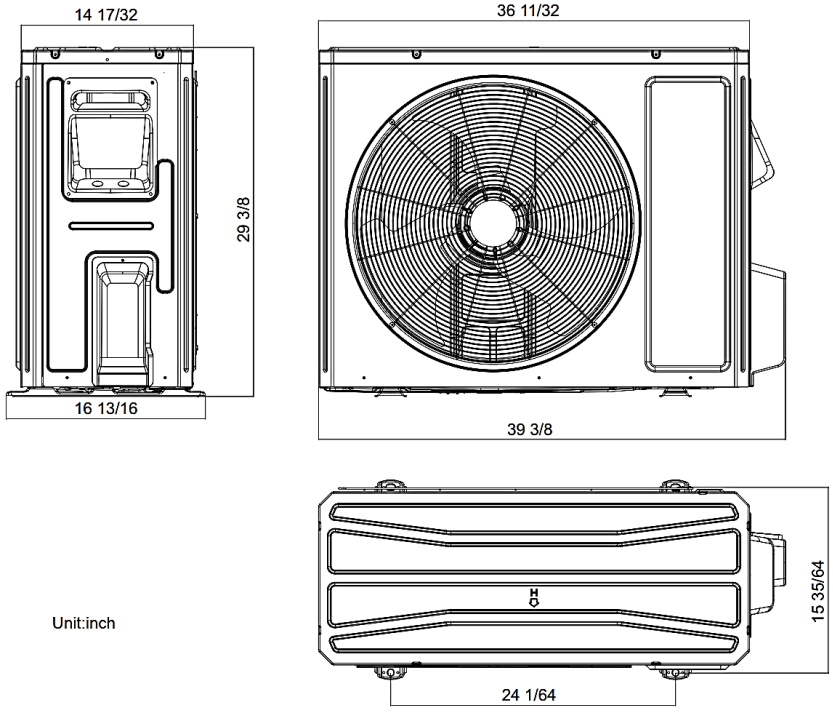

Unit:inch

Weight (Net/Gross) 123 /134 LBS

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	5/8-in OD Flared

Notes:

1. Recommended Interconnecting Cable Type 14 AWG 4 Stranded Copper Conductors Wire
2. Power wiring cable size must comply with applicable national and local codes
3. Test conditions are based on AHRI 210/240.