R32 SINGLE/MULTI- ZONE
1-Way Cassette SYSTEM

18,000 BTU / H 1-Way Cassette

SUBMITTAL DATA: TLH18D32AI + TWH18PD32AO

Job Name	Location		Date	
Purchaser	Engineer			
Submitted To	For	Reference	Approval	Construction
Unit Designation	Schedule No.			

AHRI CERTIFIED REF	**218001433**
ENERGY STAR No.	**4515450**





YBE1FB1F
(Standard)



YAW1F9
Cool-only
(Optional)



XE72-44/E
(Optional)



XE71-00/E
(Optional)



SYSTEM RATINGS		INDOOR UNIT DATA	
Cooling		**Fan Motor**	
Rated Capacity @ 95° F	18,000 BTU/H	Type	Cross
Capacity Range	4,400-19,107 BTU/H	Panel Dimension L x D x H (inch)	47-1/4 × 18-7/64 × 2-11/64
Power Input	1,650 W	Output Power	30 W
Power Input (Min/Max)	250 / 1,950 W	FLA	0.5 A
SEER2 / EER2	21.5 / 10.9	Drainage Hose Size	1”
Heating		Air flow (Min/Max)	265/412 CFM
Rated Capacity @ 47° F	18,000 BTU/H	Dehumidification	3.80 pt/hr
Capacity Range	4,300-18,000 BTU/H	**Sound Pressure Level**	
Rated Capacity @ 17°F	14,700 BTU/H	Min / Max	35 / 43 dB(A)
Rated Capacity @ 5°F	12,600 BTU/H	**OUTDOOR UNIT DATA**	
Power Input	1,650 W	**Compressor**	
Power Input (Min/Max)	260 / 1,650 W	Type	DC Inverter Rotary
HSPF2 (Region IV / V)	8.5 / 7.0	RLA	10.35 A
COP @47°F / @5°F	3.20 / 1.80	**Fan Motor**	
Operating Range		Output Power	60 W
Cooling	0°F ~ 122°F	FLA	1.35 A
	-18°C ~ 50°C	Sound Pressure Level	53 dB(A)
Heating	-22°F ~ 86°F	**Refrigerant Piping Data**	
	-30°C ~ 30°C	Liquid Pipe Size (OD)	1/4-in
Power Supply		Gas Pipe Size (OD)	1/2-in
Rated	208/230 V, 1 Phase, 60 Hz	Connection Method	Flared
Voltage Range	187 - 253 V	Pre-Charged R32 Amount	40.6 oz
Main Power Wire Size	Per Local Code	Additional Charge	0.2 oz/ft
Wire Size between IDU & ODU	14-4 AWG Unshielded	Pre-Charge Length	25-ft
MCA	16 A	MAX Refrigerant Pipe Length	131-ft
MOCP/Max Breaker Size	20 A	MIN Refrigerant Pipe Length	10-ft
Moisture Protection	IPX4	MAX Refrigerant Pipe Height Difference	82-ft

TOSOT.COM

R32 | INVERTER | Intertek | AHRI CERTIFIED www.ahridirectory.org | ENERGY STAR COLD CLIMATE

FEATURES & FUNCTION SUMMARY: TLH18D32AI + TWH18PD32AO


SYSTEM FEATURES	
Multi Fan Speeds	7 Speeds
Indoor Fan Type	Cross
Artificial Intelligence for Saving Energy	Version 1.0
Wired Controller Interface	YES
Auxiliary Electrical Heater	Optional with XE71-00/E
Ventilation (Outdoor Air)	NO
Condensate Pump	YES
Overflow Cut-off Switch	YES
Electronic Expansion Valve	In Outdoor Unit
Coil Construction	Copper Tube-Aluminum Fin
Indoor Fin Coating (Blue)	Acrylic Resin/Anti-Corrosion
A2L Refrigerant Leakage Detector	Optional
WIRED CONTROLLER & REMOTE CONTROLLER FUNCTIONS	
Auto Mode	YES
Auto Fan	YES
Turbo Cooling	YES
Auto Swing (Horizontal)	YES
Auto Swing (Vertical)	YES
Dry Mode	YES
Dry Anti-Mildew (X-Fan) Mode	YES
Energy Saving Mode	YES
I Feel Function	YES
Lock on Remote Controller	YES
Quiet Mode	YES
Long Time Room Temperature Display ※	YES
Normal Sleep Mode	YES
Timer Mode	YES
LCD Back Light on Remote Controller	YES
Turbo Mode	YES
Cooling Only Controller	Optional with Remote YAW1F9
Freeze Guard/Holiday Mode (46°F/8°C)	YES
24Vac Signal 3rd party Backup Heater Output	Optional with XE71-00/E
Wifi Control	Optional with XE72-44/E

※ Available on XE72-44/E with [Mode]+[▲] during OFF status

DIMENSIONAL SPECIFICATIONS: TLH18D32AI

INDOOR UNIT DIMENSION

Unit: inch

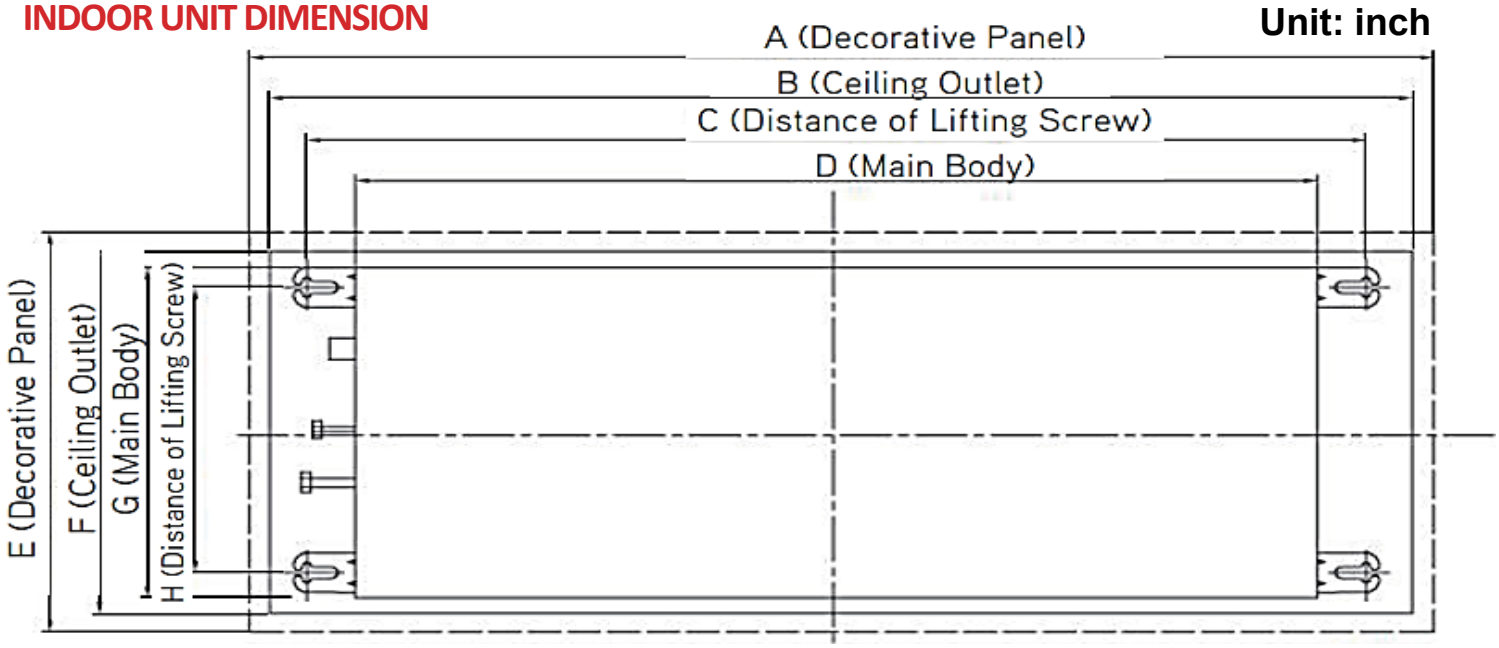


Item	A	B	C	D	E	F	G	H
Value	47-1/4	43-57/64	40-7-16	38-55/64	18-7/64	16-11/32	15-5/32	10-9/32

Net Weight: 45 LBS

Gross Weight: 60 LBS

INDOOR CLEARANCE


Unit: inch

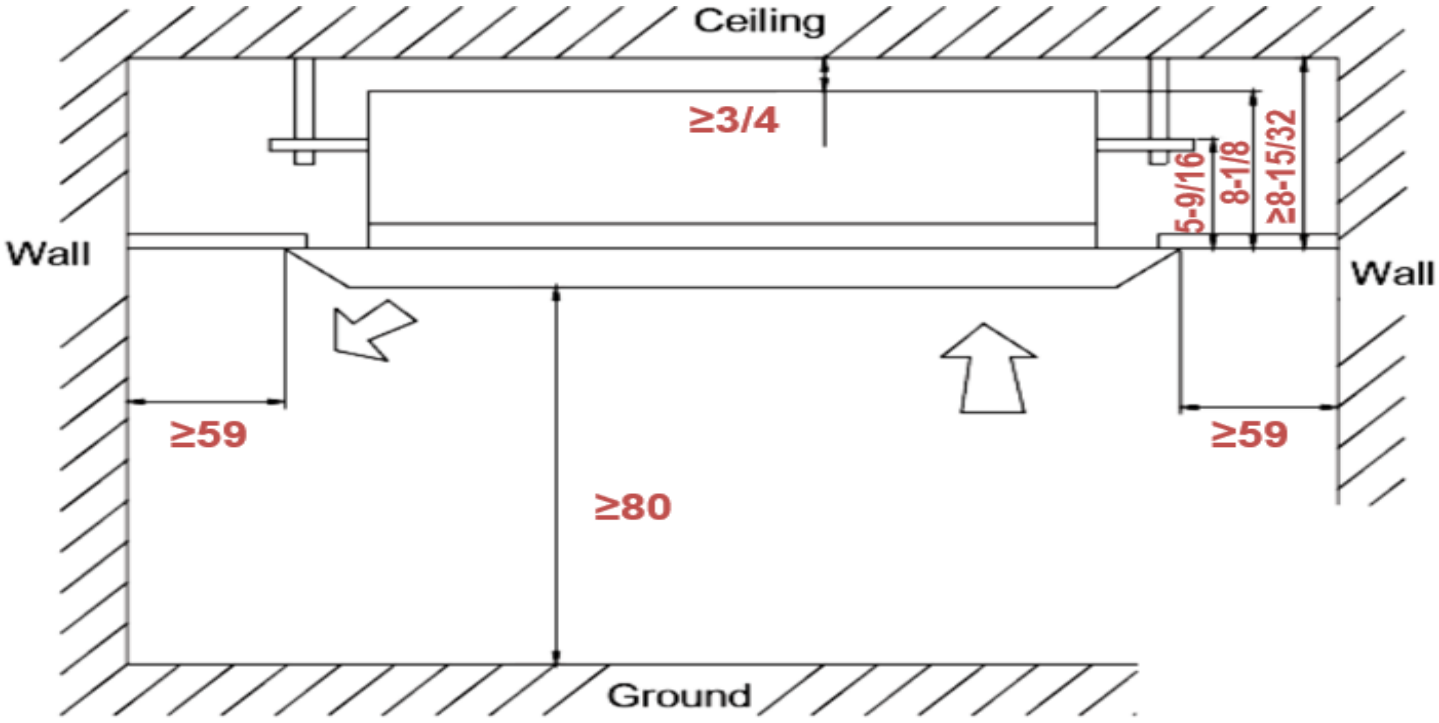


DIMENSIONAL SPECIFICATIONS: TWH18PD32AO

MINIMUM SPACING REQUIREMENTS

Unit: inch

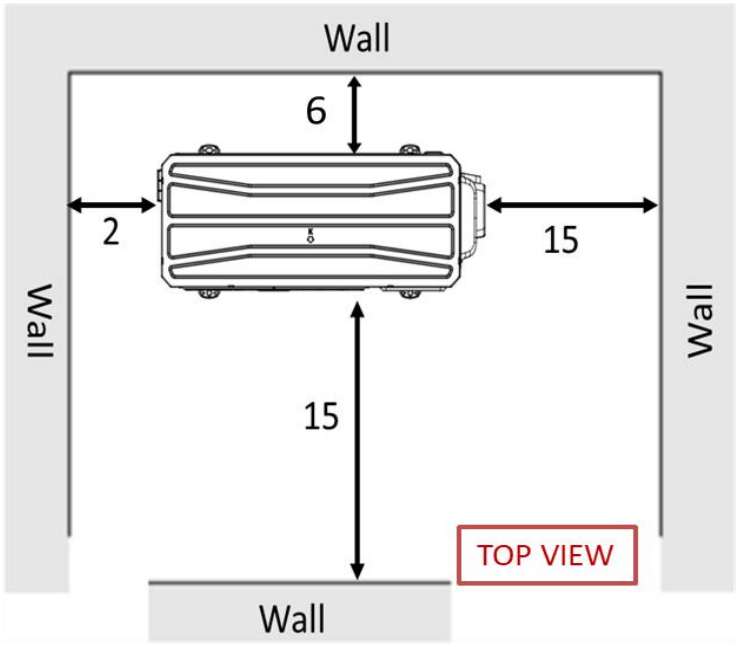


The ceiling should be open

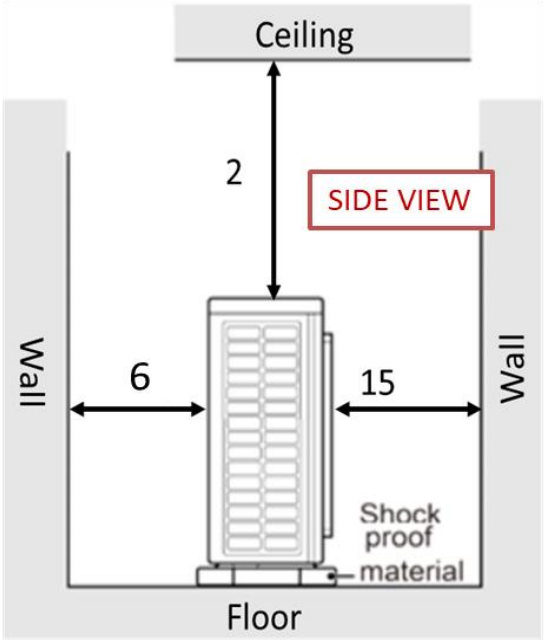

Either left or right side should be open

Note: Wall height on air outlet side ≤ 50inch

OUTDOOR UNIT DIMENSIONS

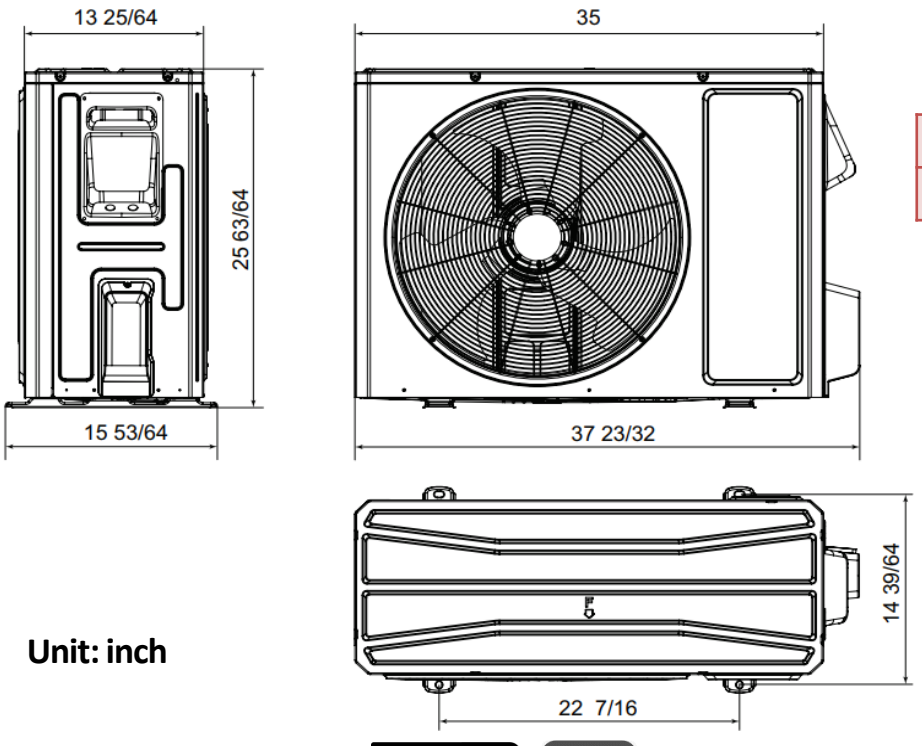

Unit: inch

Weight (Net/Shipping)
95 / 105 LBS

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	1/2-in OD Flared

Notes:

1. Recommended Interconnecting Cable Type 14 AWG 4 Stranded Copper Conductors Wire
2. Power wiring cable size must comply with applicable national and local codes
3. Test conditions are based on AHRI 210/240.