# R32 HEAT / COOL

## DAILY CHARMING, COOLING CHARMO

### 30,000 BTU / H WALL MOUNTED INDOOR UNIT

## SUBMITTAL DATA: TWH30CD32AI

| | | | | |
|---|---|---|---|---|
| Job Name | Location | | Date | |
| Purchaser | Engineer | | | |
| Submitted To | For | ☐ Reference | ☐ Approval | ☐ Construction |
| Unit Designation | Schedule No. | | | |







TOSOT+ app



XE72-44/E (Optional)



XE71-00/E (Optional)



YBE1FB1F (Standard)



YAW1F9 Cool-only (Optional)


| SYSTEM RATINGS | |
|---|---|
| **Cooling** | |
| Nominal | 30,000 BTU/H |
| Dehumidification | 7.40 pt/hr |
| **Heating** | |
| Nominal | 30,000 BTU/H |
| **Sound Pressure Level** | |
| Cooling (Low/High) | 36 / 52 dB(A) |
| Heating (Low/High) | 36 / 53 dB(A) |
| Air flow (Min/Max) | 441 / 794 CFM |
| Net / Gross Weight | 35 / 41 lbs |
| **Dimension** | |
| Outline (WxHxD) inch | 42-7/16 x 13-7/64 x 9-11/16 |
| **Power Supply （Powered by Outdoor Unit)** | |
| 208-230V/1Ph/60Hz | |
| Main Power Wire Size | AWG 14-4 |
| **Refrigerant Piping Data** | |
| Liquid - Gas Pipe Size (OD) | 1/4" - 5/8" |
| Connection Method | Flared |

| SYSTEM FEATURES | |
|---|---|
| Indoor Fin Coating (Blue) | Acrylic Resin / Anti-Corrosion |
| Memory/Power Failure Recovery | YES |
| WIFI Included with Indoor Unit | YES |
| Indoor Fan Type | Cross-flow |
| Multi Fan Speeds | 7 Speeds |
| Indoor Unit Display | YES |
| Auxiliary Electrical Heater | NO |
| Auto Mode | YES |
| Auto Fan | YES |
| Wireless Interlock with Sinope Thermostat | Optional |
| Dry Anti-Mildew Mode / X-Fan | YES |
| Energy Saving Mode on Setting | YES |
| Dirty Filter Alert | YES |
| I Feel Function | YES |
| Child Lock on Remote Controller | YES |
| Quiet Mode | YES |
| Sleep Mode | YES |
| Turbo Mode | YES |
| Freeze Guard Mode | YES |
| Auto Swing | Vertical |
| Buzz Volume Adjustable | NO |
| Auto Brightness for Panel Display | NO |
| Wired Controller | XE72-44/E |
| 24Vac Signal 3rd party Backup Heater Output | XE71-00/E |
| Cooling Only Remote Controller | YAW1F9 |


# DIMENSIONAL SPECIFICATIONS: TWH30CD32AI


## MINIMUM SPACING REQUIREMENTS

**Unit: inch**

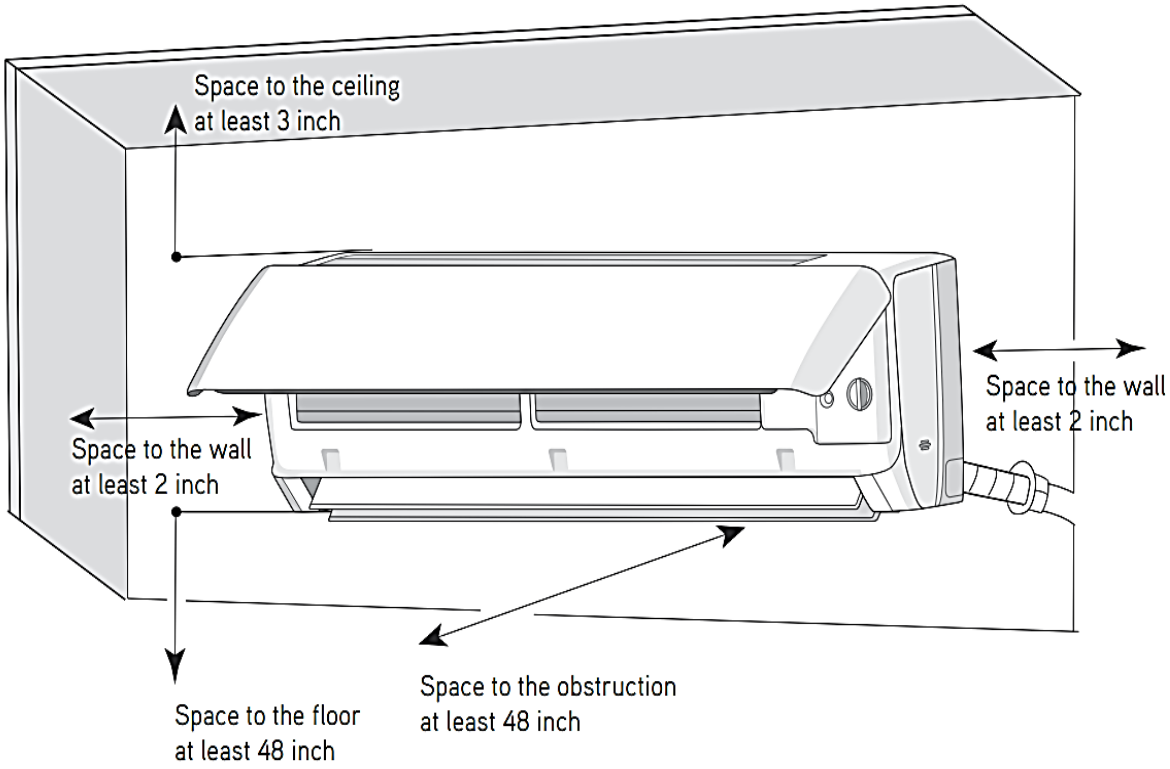


## INDOOR UNIT DIMENSIONS

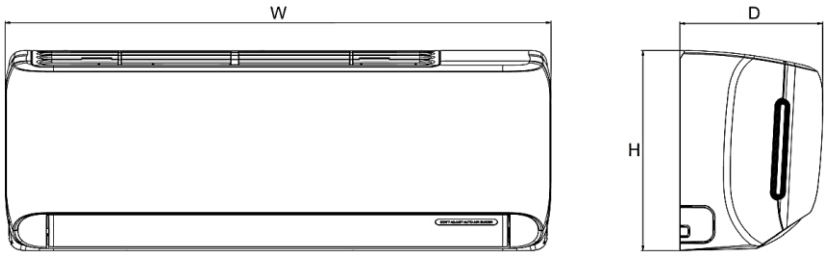

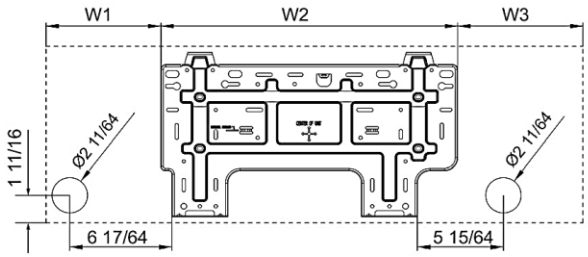
**Unit: inch**

| Dimensions | |
|---|---|
| D | 9 11/16 |
| H | 13 1/8 |
| W | 42 7/16 |
| W1 | 10 3/16 |
| W2 | 22 3/32 |
| W3 | 10 5/32 |

| | |
|---|---|
| Liquid Line Valve | 1/4-in OD Flared |
| Gas Line Valve | 5/8-in OD Flared |
| Drain Connector | 5/8-in OD |



R32 INVERTER ETL Intertek AHRI CERTIFIED www.ahridirectory.org