HEAT / COOL

DAILY CHARMING, COOLING CHARMO

7,000 BTU / H WALL MOUNTED INDOOR UNIT

SUBMITTAL DATA: TW07HXCA5DI

Job Name	Location		Date	
Purchaser	Engineer			
Submitted To	For	☐ Reference	☐ Approval	☐ Construction
Unit Designation	Schedule No.			







TOSOT+ app



XK76 (Optional)



YAP1F7 (Standard)



XE71-00/E (Optional)


SYSTEM RATINGS	
Cooling	
Nominal	7,000 BTU/H
Rated Capacity @ 95° F	/
SEER / SEER2	/
EER / EER2	/
Heating	
Nominal	8,000 BTU/H
Rated Capacity @47° F	/
Rated Capacity @17° F	/
Rated Capacity @5° F	/
HSPF/HSPF2	/
COP	/
Dehumidification	1.27 pt/hr
Sound Pressure Level	
Cooling (Low/High)	24 / 39 dB(A)
Heating (Low/High)	24 / 39 dB(A)
Air flow (Min/Max)	135 / 258 CFM
Net / Gross Weight	16 / 19 lbs
Operating Range	
Cooling	/
Heating	/
Power Supply （Powered by Outdoor Unit)	
208-230V/1Ph/60Hz	
Main Power Wire Size	AWG 14-4
Refrigerant Piping Data	
Liquid - Gas Pipe Size (OD)	1/4" - 3/8"
Connection Method	Flared

SYSTEM FEATURES	
Memory/Power Failure Recovery	YES
Wired Controller	XK76
WIFI Included with Indoor Unit	YES
Indoor Fan Type	Cross-flow
Multi Fan Speeds	4 Speeds
Indoor Unit Display	YES
Auxiliary Electrical Heater	NO
Auto Mode	YES
Auto Fan	YES
Auto Swing (Horizontal Auto Swing)	NO
Auto Swing - 180°(Vertical Auto Swing)	YES
Clock on Remote Controller	YES
Dry Mode	YES
Dry Anti-Mildew (X-Fan) Mode	YES
Energy Saving Mode	YES
Dirty Filter Alert	NO
I Feel Function	YES
Quiet Mode	YES
Room Temperature Display	YES
Sleep Mode	YES
Timer Mode	YES
Turbo Mode	YES
24Vac Signal 3rd party Backup Heater Output	Optional with XE71-00/E
Freeze Guard Mode	NO
Power Failure Mode	YES

DIMENSIONAL SPECIFICATIONS: TW07HXCA5DI


MINIMUM SPACING REQUIREMENTS

Unit: inch

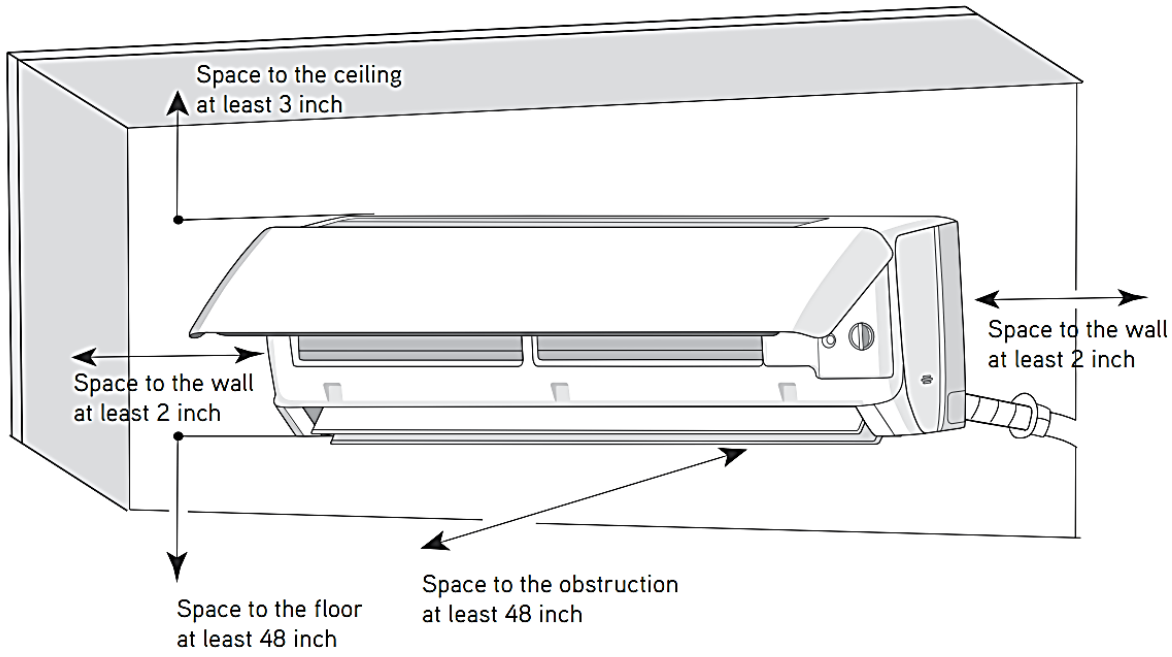

INDOOR UNIT DIMENSIONS

Unit: inch

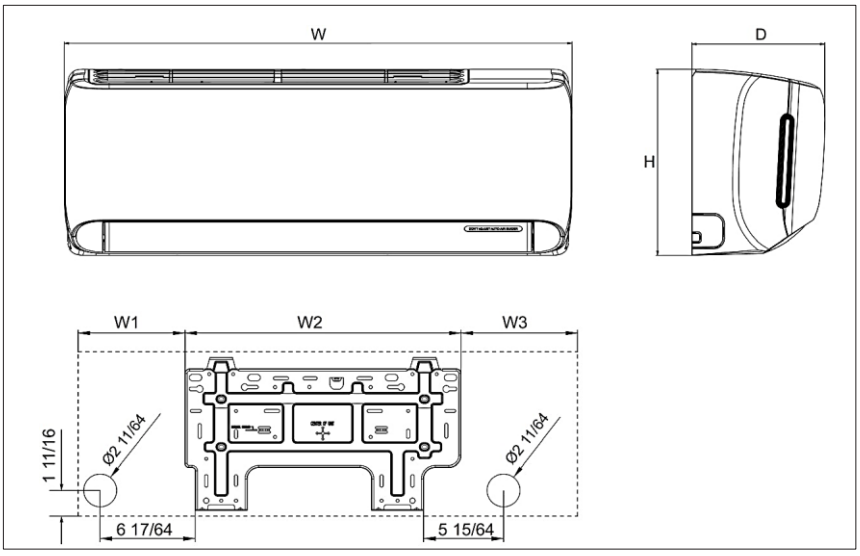

Dimensions	
D	7-5/16
H	10-1/4
W	27-7/8
W1	3-25/32
W2	18-5/32
W3	5-15/16

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	3/8-in OD Flared
Drain Connector	5/8-in OD