www.TOSOT.com

TOSOT

Technology, Outstanding, Style, Originality & Trust

R32

Versati IV

- Side discharge condenser
- Quiet operation
- Outlet water temperature up to 150°F (65°C)
- Heating down to -13°F (-25°C) ambient
- 5.8 kW electric aux heater included
- Built-in circulation pump
- Wired controller included
- Emergency mode
- Variable-speed inverter compressor
- Heavy-gauge steel cabinet




SCAN QR CODE FOR MORE INFO



HEAT PUMP

Model		TRS-CQ16Pd/NhG3-D
SYSTEM PARAMETER		
Cooling Capacity	Btu/h	45,726
Heating Capacity	Btu/h	54,598
EER / COP		11.8 / 4.4
Refrigerant Type		R32
Refrigerant Pre-charged (R32)	oz	77.6
CONDENSING UNIT SPECIFICATIONS		
Dimensions (W x H x D)	in	47 ½ x 34 9/16 x 17 ½
Weight (Net / Gross)	lbs	328 /357
Ambient Temperature (Cooling)	°F / °C	5 ~ 118 / -15 ~ 48
Ambient Temperature (Heating)	°F / °C	-13 ~ 95 / -25 ~ 35
Water Leaving Temperature (Cooling)	°F / °C	41 ~ 77 / 5 ~ 25
Water Leaving Temperature (Heating)	°F / °C	68 ~ 149 / 20 ~ 65
Sound Pressure Level (Cooling)	dB(A)	54
Sound Pressure Level (Heating)	dB(A)	54
MCA / MOCP	A	37 /60
Max Water System Pressure	MPa / PSIG	43 / 0.3
Rated Water Volume	LPM / GPM	34.4 / 9.1
Water Connection (NSP)	in	1.0
ELECTRICAL		
Power Supply		208 - 230V / 1Ph / 60Hz
MCA / MOCP	A	32 / 35

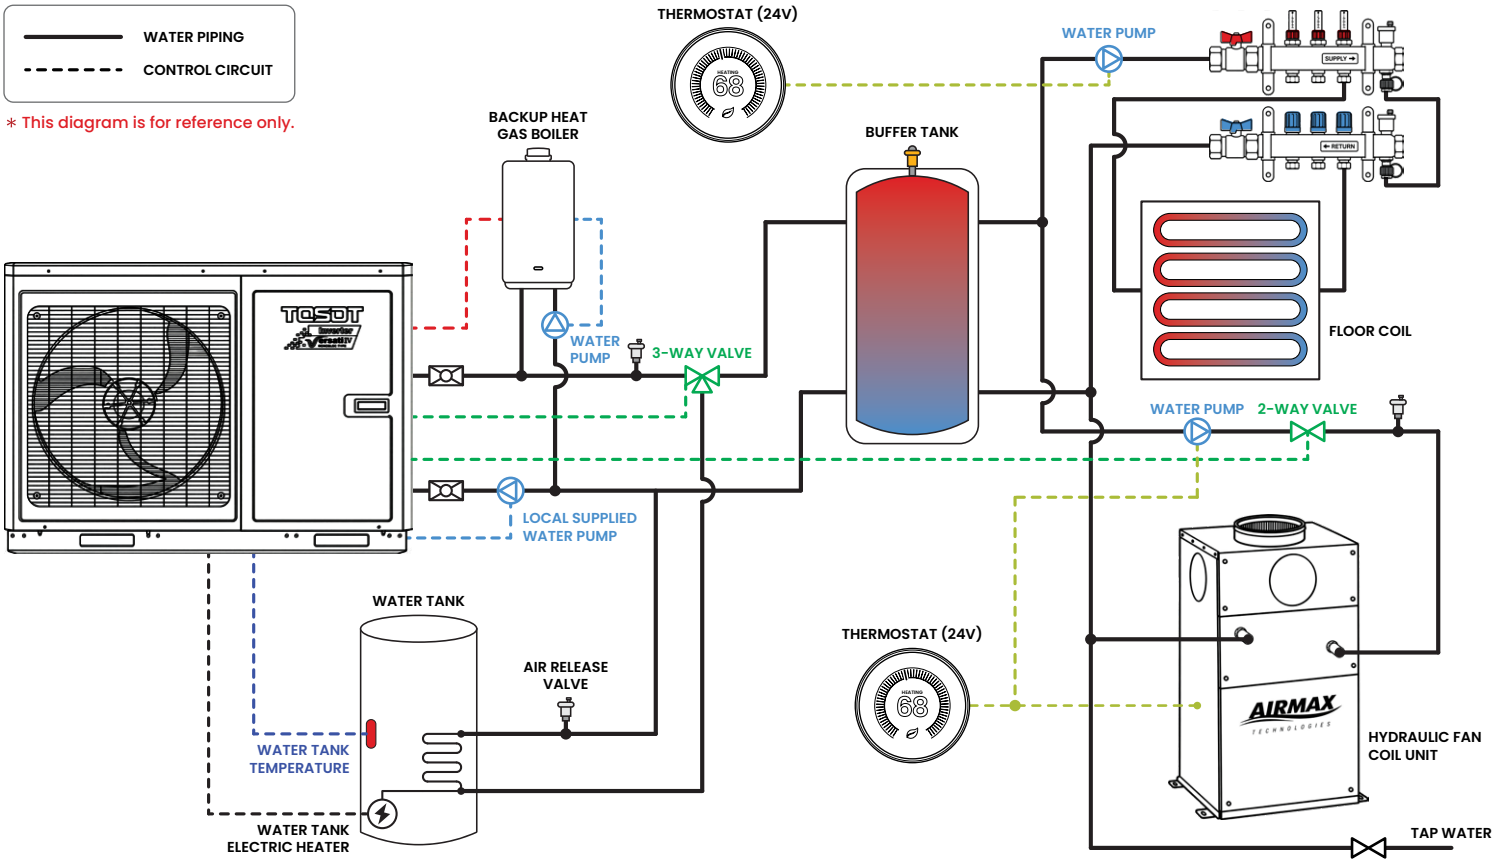

R32 INVERTER AHRI CERTIFIED