TMV- 5 mini Series

24,000 BTU / VRF SYSTEM

SUBMITTAL DATA: TMVRF-OC24KHP

Job Name	Location		Date	
Purchaser	Engineer			
Submitted To	For	☐ Reference	☐ Approval	☐ Construction
Unit Designation	Schedule No.			

TMVRF-OC24KHP



Model			TMVRF-OC24KHP
System Performance			
Capacity Range		Ton	2
Nominal Capacity	Cooling	kBtu/h	24
	Heating	kBtu/h	28
Sound Pressure Level		dB(A)	57
Operating Temperature Range	Cooling	°C/°F	-5~48 / 23~118
	Heating	°C/°F	-20~27 / -4~81
AHRI Certificate Reference Number		-	205049534 / 205049535
Cooling Capacity@95F		kBtu/h	24 / 24
SEER(Ducted/Non-Ducted)		-	18.00 / 18.00
SEER2(Ducted/Non-Ducted)		-	18.00 / 18.00
Heating Capacity@47F		kBtu/h	28 / 28
HSPF(Ducted/Non-ducted)		-	10.00 / 10.00
HSPF2(Ducted/Non-ducted)		-	8.00 / 8.50
Heating Capacity@5F(Ducted/Non-ducted)		kBtu/h	14.0 / 14.0
Electrical Data			
Power Supply		-	208/230V, 1 Phase, 60Hz
Maximum Overcurrent Protection (MOP)		A	25.0
Minimum Circuit Amps (MCA)		A	21.0
Fan			
Type x Quantity		-	Axial- flow x 1
Air Flow Volume		CFM	2,295
		m^3/h	3,900
Fan Motor Power Output		W	150
Compressor			
Compressor Type x Quantity		-	Inverter rotary x 1
Compressor Rated Load Amps (RLA)		A	11.7
Oil Type		-	FW68DA
Oil Charge Volume(Compressor charged)		L	1
Connection Piping			
Gas Pipe		inch	5/8
Liquid Pipe		inch	3/8
Refrigerant Type		-	R410A
Refrigerant Charge Amount		kg/oz	2.4 / 84.7
Dimension/Weight			
Unit Dimensions (W x D x H)		inch	38-9/16 x 14-3/16 x 31-1/8
		mm	980 x 360 x 790
Weight	Net	lbs/kg	176 / 80
	Gross	lbs/kg	198 / 90
Other			
Capacity Diversity Range(IDUs/ODU)		-	50%~135%
Moisture Protection		-	IPX4

TOSOT


TMV- 5 mini Series

24,000 BTU / VRF SYSTEM

TMVRF-OC24KHP

Dimension and Installation Hole

Unit: mm(inch)

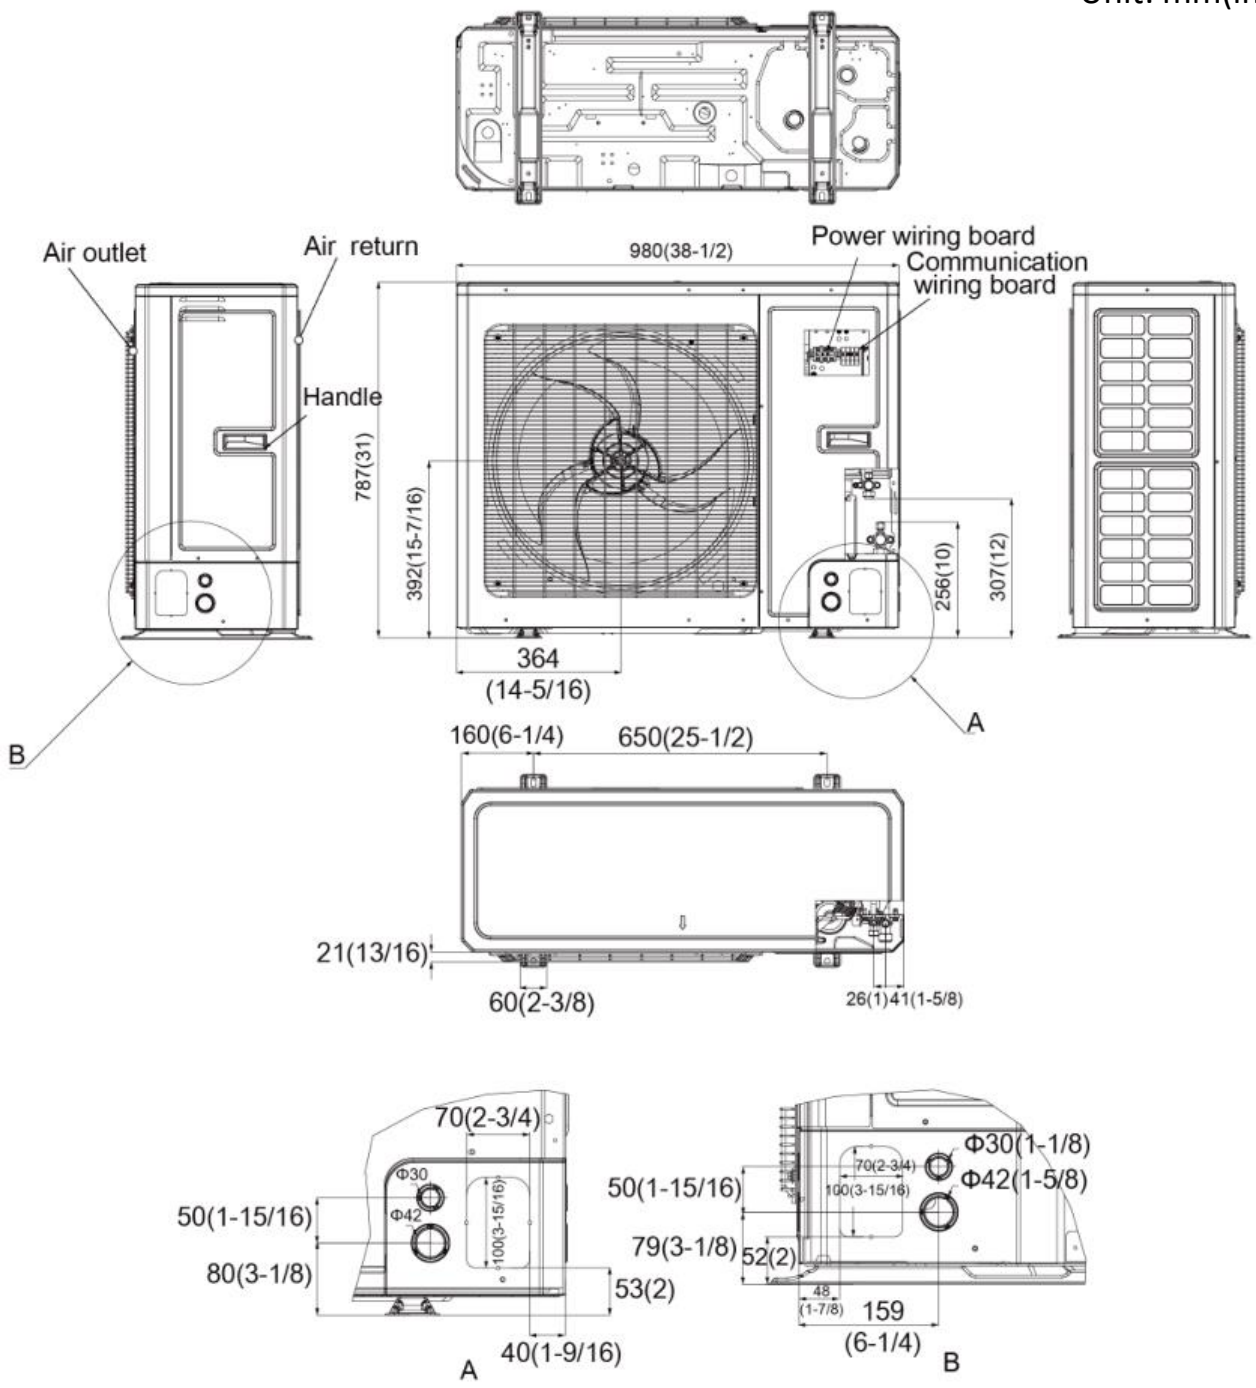

R410A INVERTER Intertek AHRI CERTIFIED

TOSOT


TMV- 5 mini Series


24,000 BTU / VRF SYSTEM

TMVRF-OC24KHP


Installation Clearance

Unit: mm(inch)

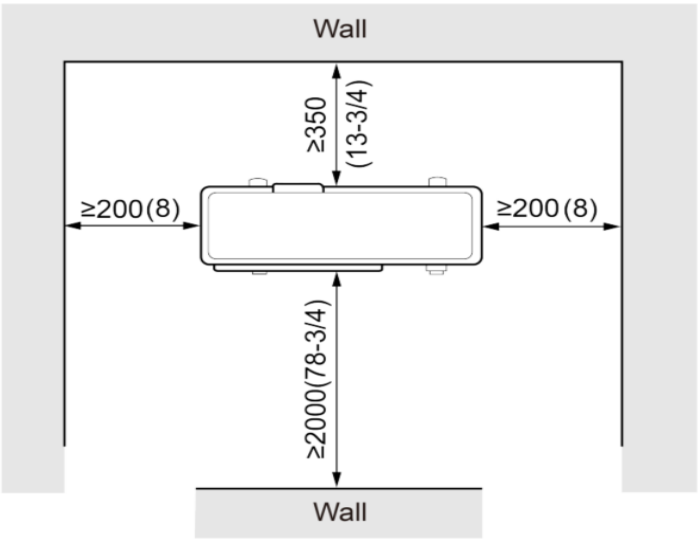

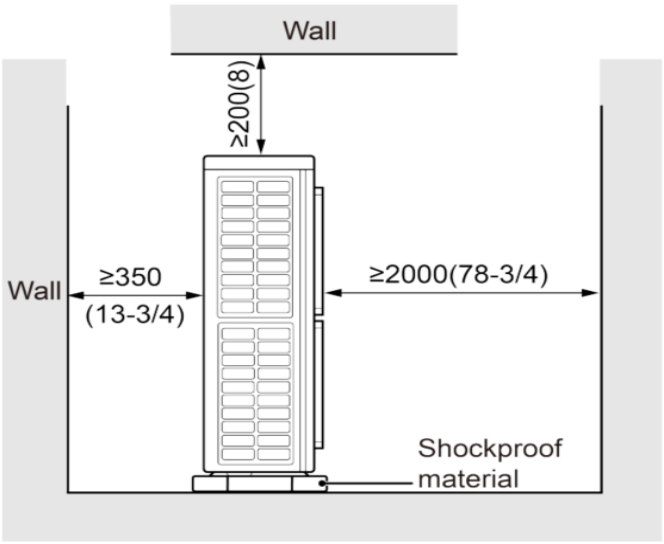

Acoustic Octave-band Sound Power Data

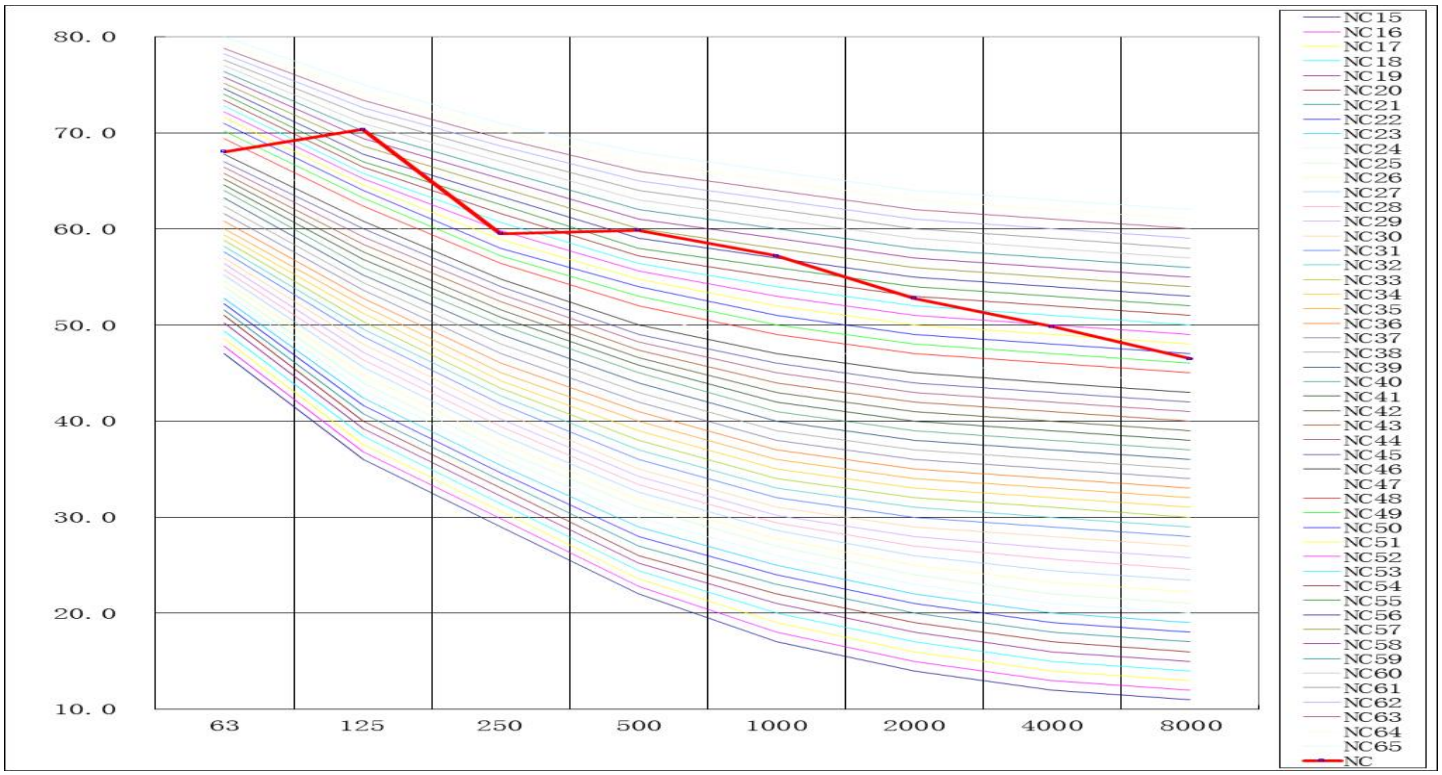


R410A INVERTER Intertek AHRI CERTIFIED

TOSOT

TMV- 5 mini Series

24,000 BTU / VRF SYSTEM

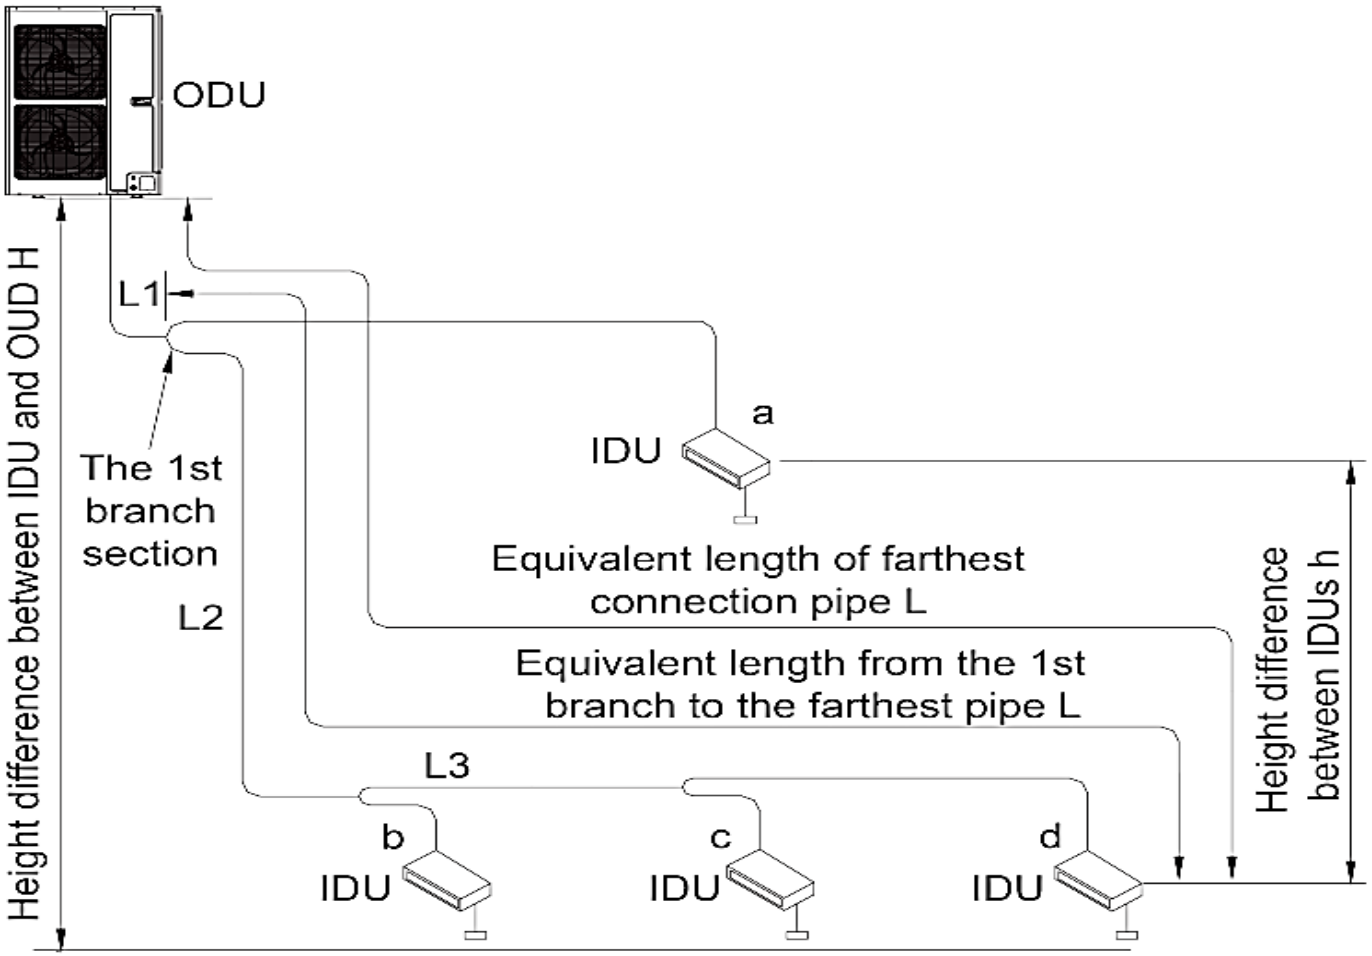

		Allowable value		Fitting pipe
		m	feet	
Total length (actual length) of fitting pipe		250	820	L1+L2+L3+a+b+c+d
Length of farthest fitting pipe (m)	Actual length	100	328	L1+L2+L3+d
	Equivalent length	120	394	
From the 1st branch to the farthest indoor pipe		40	131	L2+L3+d
Height difference between ODU and IDU	ODU at upper side	30	98	——
	ODU at lower side	30	98	——
Height difference between IDUs		10	33	——

R410A INVERTER Intertek AHRI CERTIFIED